

Planetary gears

# IMS.62 Pro LN<sup>®</sup>

Our planetary gear from the Pro Series with outer diameter 62 mm combines performance with robustness. Due to easy adaptations of the configuration all Pro gears are also available in Low Noise (LN) design.



**Low Noise (LN)**

Due to the use of helical gearing in the first stage particularly low noise.



**Performance**


Powerful, long-lived and robust - the planetary gear convinces in a multitude of applications.



**Temperature**

Also ideally suited for demanding temperature ranges from -30° to +120°C.

Technical data	1-stage	2-stage	3-stage
<b>Permissible output torque TAB (CB = 1.0)</b>	8.0 Nm	25.0 Nm	50.0 Nm
<b>Gear efficiency approx.</b>	0.8	0.8	0.7
<b>Max. Gear backlash</b>	0.7 °DEG	0.7 °DEG	0.8 °DEG
<b>Recommended input speed</b>	3.000 rpm	3.000 rpm	3.000 rpm

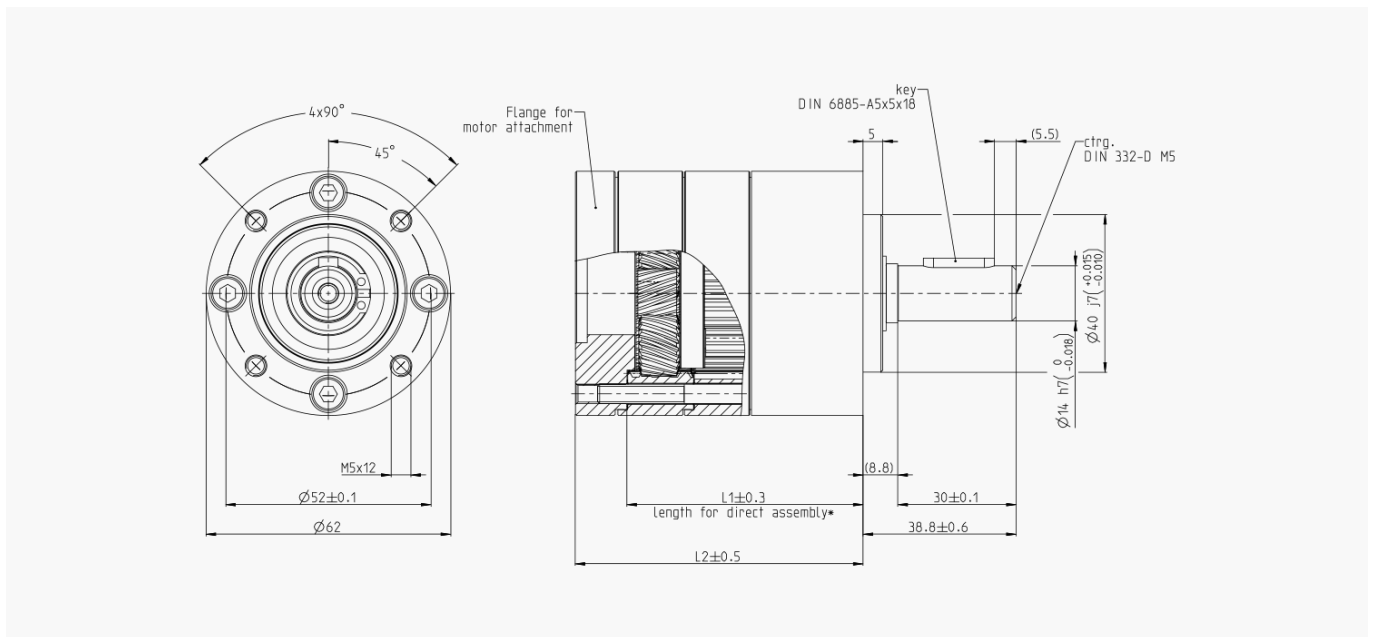

All dimensions in millimetres [mm]

**Reductions**

1-stage	2-stage	3-stage
4:1 (3,65)	14:1 (13,53)	50:1 (50,16)
5:1 (4,59)	16:1 (15,65)	58:1 (58,01)
5:1 (5,36)	17:1 (17,00)	67:1 (67,08)
7:1 (6,55)	19:1 (18,92)	70:1 (70,13)
9:1 (8,63)	23:1 (22,96)	81:1 (81,11)
13:1 (13,20)	25:1 (24,65)	91:1 (91,36)
	28:1 (27,76)	98:1 (98,07)
	28:1 (28,05)	102:1 (101,89)
	34:1 (33,92)	106:1 (105,65)
	45:1 (44,69)	115:1 (114,77)
	58:1 (58,22)	123:1 (123,20)
	68:1 (68,40)	128:1 (127,74)
	89:1 (89,10)	137:1 (136,99)
		145:1 (145,36)
		166:1 (166,40)
		176:1 (175,75)
		192:1 (191,54)
		232:1 (231,59)
		302:1 (301,68)
		393:1 (392,98)
		462:1 (461,70)
		601:1 (601,43)

Output side with ball bearing	1-stage	2-stage	3-stage
<b>Max. radial load (centre of output shaft)</b>	240,0 N	360,0 N	520,0 N
<b>Max. Axial load</b>	70,0 N	100,0 N	150,0 N
<b>Max. permissible contact pressure</b>	1,000,0 N	1,000,0 N	1,000,0 N
<b>Weight approx.</b>	800 g	1200 g	1600 g

Gear length	1-stage	2-stage	3-stage
<b>Length 1<sup>1</sup></b>	42,9 ± 0,3	59,8 ± 0,3	76,8 ± 0,3
<b>Length 2<sup>1</sup></b>	54,6 ± 0,5	71,5 ± 0,5	88,5 ± 0,5

<sup>1</sup> A calculated minimum length of the gearbox is given under the condition of an optimal connection of flange and motor. Please contact us directly for your specific project.

All data in this brochure are approximates

Deviations are possible and are due, for example, to non-standardized testing and measuring methods. Please contact us directly for detailed information. We reserve the right to make technical changes without prior notice. Please refer to our website [www.imsgea.com](http://www.imsgea.com) for the current status.

